

Commercial Tapware



CLEANAJET[®]
STAINLESS STEEL

Exposed Wall Mount Pre-Rinse Unit




T-3M53430

- Full S/S construction
- Equipped with a water saving 6 star 4LPM variable trigger valve
- Fully assembled and bench tested, with a unique traceable serial number
- Working pressure range 150kPa-500kPa
- Maximum operating temperature 80 degrees




Top

Set-Out 205 Centres
Min 195 - Max 215

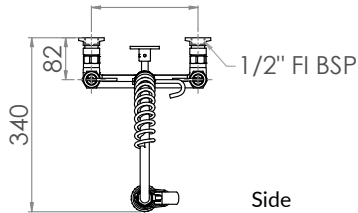

Side

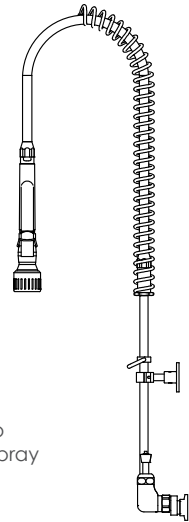

Front

